


- 200 W.O.G.(PN16)
- Non-rising Stem
- Conforms to MSS-SP-80 and BS EN 12288 (BS 5154)
- Screwed Ends & CxC
- Solid Wedge Disc



FIG : F1111

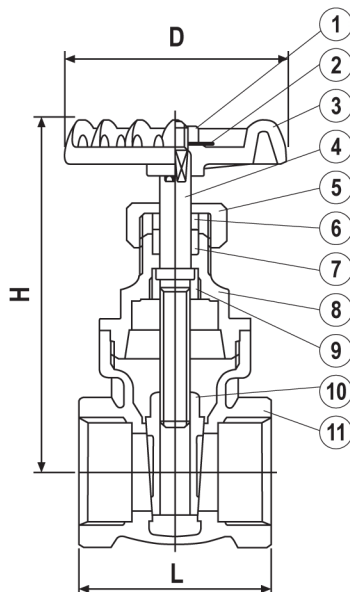

NO.	PART	MATERIAL	SPEC.JIS	SPEC.ASTM
1	WHEEL NUT	STEEL	S10C	AISI-1010
2	NAME PLATE	ALUMINUM	A1100P	B209-1100
3	HAND WHEEL	CAST IRON	FC20	A48 CLASS / NO.35
4	STEM	BRASS	C3604B	B16-C36000
5	PACKING NUT	BRASS	C3604B	B16-C36000 (1/4"~1")
		CAST BRASS	YBSC3	B584-C85700 (1 1/4"~4")
6	GLAND	BRASS	C3604B	B16-C36000
7	GLAND PACKING	GRAPHITE	COMMERCIAL	COMMERCIAL
8	BONNET	CAST BRASS	YBSC3	B584-C85700
9	LOCK NUT	BRASS	C3604B	B16-C36000
10	DISC	CAST BRASS	YBSC3	B584-C85700
11	BODY	CAST BRASS	YBSC3	B584-C85700

Test pressure : Shell 348 PSI (24bar) (Hydrostatic)
 Seat 255 PSI (17.6bar) (Hydrostatic)

NOMINAL	DIMENSION (mm)			PCS	
SIZE	L	H	D	Carton	Case
1/4"	41	70	54	120	300
3/8"	41	70	54	120	300
1/2"	43	72	54	120	300
3/4"	47	84	54	90	200
1"	54	98	61	60	150
1 1/4"	61	116	77	40	100
1 1/2"	62	125	77	32	80
2"	72	153	83	20	60
2 1/2"	89	186	105	12	30
3"	101	222/220	130/112	8	20
4"	116	249/258	172/132	4	9