

- 600 W.O.G.
- Blow-out Proof Stem
- Conforms to MSS-SP-110 and BS EN 13828
- Screwed Ends & CxC
- 150 PSI Saturated Steam


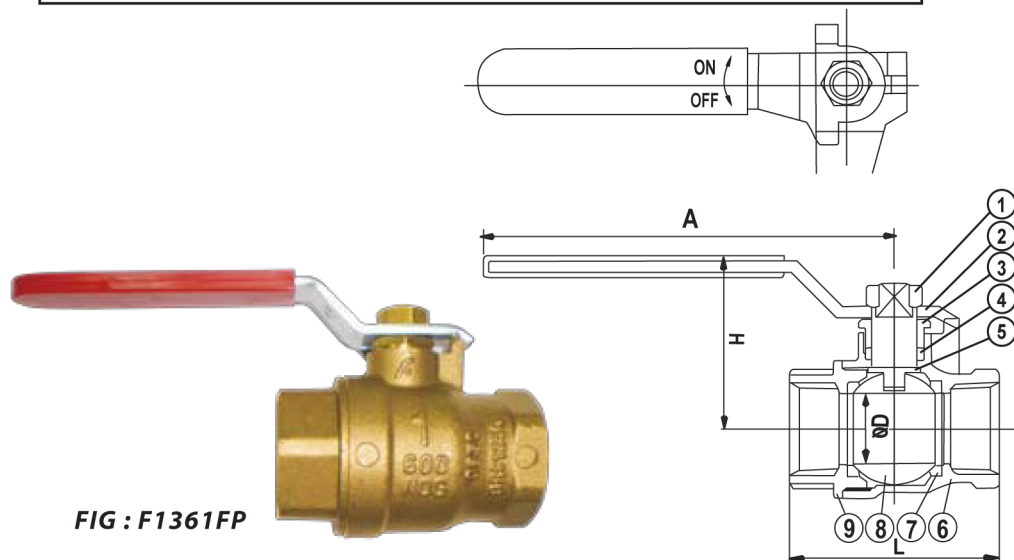


FIG : F1361FP

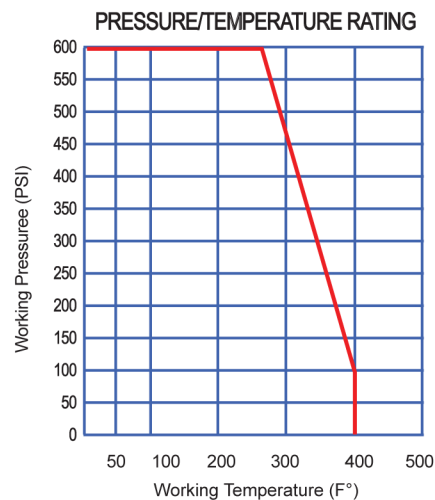

NO.	PART	MATERIAL	SPEC.JIS	SPEC.ASTM
1	NUT	STEEL	S10C	AISI-1010
2	HANDLE	STEEL	SS41	A283-D
3	STEM GLAND SCREW	BRASS	C3604B	B16-C36000
4	STEM PACKING	TEFLON	PTFE	PTFE
5	STEM	BRASS	C3604B	B16-C36000
6	BODY	FORGED BRASS	C3771B	B124-C37700 (1/8"~1 1/2")
		CAST BRASS	YBSC3	B584-C85700 (2"~4")
7	BALL DISC PACKING	TEFLON	PTFE	PTFE
8	BALL DISC	BRASS	C3604B	B16-C36000 (1/8"~3/4")
		FORGED BRASS	C3771B	B124-C37700 (1"~4")
9	END PLUG	FORGED BRASS	C3771B	B124-C37700

NOMINAL	DIMENSION (mm)				PCS	
SIZE	L	H	D	A	Carton	Case
1/8"	46	37	10	84	180	400
1/4"	46	37	10	84	180	400
3/8"	46	37	10	84	180	400
1/2"	51	39	12.7	84	120	400
3/4"	60	50	20	118	90	200
1"	73	54	25	118	60	144
1 1/4"	84	66	32	134	36	80
1 1/2"	92	70	38	134	24	64
2"	110	88	50	200	12	30
2 1/2"	131	98	63	200	8	24
3"	150	106	75	200	6	20
4"	164	106	75	200	4	8