


+ **WD** + TRUE UNION SPRING CHECK VALVE (UPVC , CPVC, PPH)

Features

- Full Port Type
- Pressure Rating 150 Psi
- Less Flow loss and seal hermetically
- Fit Compactly in spaces
- Standard JIS/ANSI/DIN



Drawing Structure

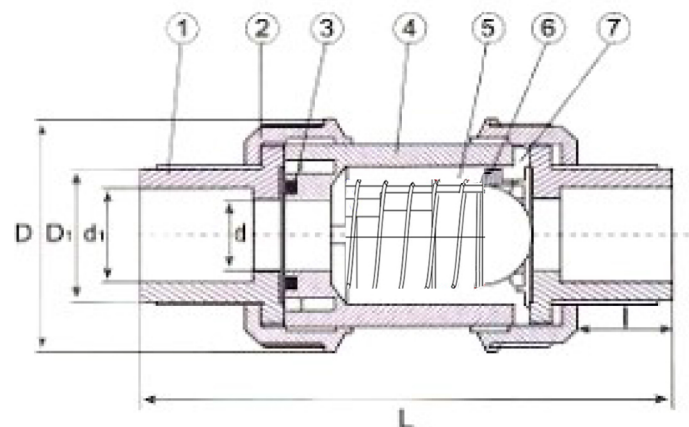

Material

NO	PART	MATERIAL	PCS
1	End	UPVC/CPVC/PP-H	2
2	Cap	UPVC/CPVC/PP-H	2
3	Seat	EPDM/VITON	1
4	Body	UPVC/CPVC/PP-H	1
5	Spring	SS304	1
6	O-ring	EPDM/VITON	1
7	Carrier	UPVC/CPVC/PP-H	1

Diamension

Unit:mm

Size	D	D1	L	d1		
				JIS	ANSI	DIN
1/2"	53.5	15	101	22	21	20
3/4"	63.3	19.5	115	26	26	25
1"	73	25	156	32	33	32
1-1/4"	97.5	32	171	38	42	40
1-1/2"	171	40	171	48	48	50
2"	195	50	195	60	60	63
2-1/2"	184	62.5	226	76	73	75
3"	199	76	274	89	89	90
4"	206	100	367	114	114	110