



SWING FOOT VALVE (NEW TYPE)

Size : 2" - 8"
 Joint End : Socket (ANSI/JIS/DIN)
 Joint End : Flange (ANSI/JIS/DIN)
 Working Pressure : 150 PSI



2" - 6"



2" - 8"

ADVANTAGES :


- 1) Material meet drinking water standard
- 2) 100% pure virgin material , CaCO3 free (Chalk)
- 3) UV resistant powder added
- 4) Can be assembled vertically or horizontally

DESCRIPTION :

- 1) Material : UPVC , CPVC , PPH
- 2) Size : 2" - 8", 50mm - 225mm ; DN50 - DN200
- 3) Standard : ANSI,DIN,JIS
- 4) Joint End : Socket,Flange
- 5) Working Pressure : 150 PSI
- 6) Operating Temperature : UPVC (0-55°C)
: CPVC (0-95°C)
- 7) Valve body color : UPVC (dark gray). CPVC (light gray)

Specification of Material

ITEM	PART	MATERIAL	QTY
1	BODY	UPVC/CPVC/PPH	1
2	BODY	UPVC/CPVC/PPH	1
3	VALVE CLACK	UPVC/CPVC/PPH	1
4	FLANGE	UPVC/CPVC/PPH	1
5	BUKLE	UPVC/CPVC/PPH	1
6	BOLT	SS304/316	8 - 12
7	PAD	SS304/316	8 - 12
8	NUT	SS304/316	8 - 12
9	O-RING	EPDM/VITON	1
10	SEAL	EPDM/VITON	1

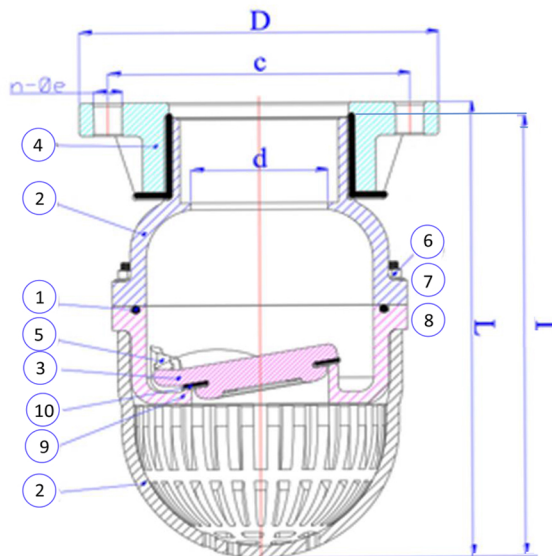

DIMENSIONS

Unit:MM

SIZE	d	D	I	L	C			n - Øe	
					ANSI	JIS	DIN	ANSI	DIN/JIS
2"(50)	50.00	125.00	210.00	255.00	140.00	140.00	145.00	4-19	
2-1/2"(65)	63.00	182.00	223.00	268.00	150.00	152.00	160.00	8-19	
3"(80)	75.00	200.00	272.00	330.00	150.00	152.00	160.00	8-19	
4"(100)	95.00	228.00	334.00	410.00	175.00	191.00	180.00	8-22	8-23
5"(125)	95.00	250.00	437.00	525.00	216.00	210.00	210.00	8-22	8-23
6"(150)	150.00	285.00	451.00	545.00	241.00	240.00	240.00	8-22	8-22
8"(200)	150.00	343.00	-	362.00	298.00			8-23	