


PVC ASTM SCH80


PVC SCHEDULE 80 FITTINGS

45° Elbows




Nom. Pipe Size	Max. O.D. Dim. M1	S804U			
		K1	C	J1	Approx. Wt.(lb)
1/2	28.58	28.58	22.62	4.76	0.069
3/4	34.93	33.73	25.80	11.11	0.101
1	42.86	35.72	30.16	5.56	0.157
1 1/4	52.39	42.86	32.54	10.32	0.228
1 1/2	58.74	46.83	34.93	11.91	0.305
2	72.23	53.98	38.89	15.08	0.664
2 1/2	92.08	63.10	44.45	18.65	0.956
3	109.54	67.47	47.63	19.84	1.524
4	133.35	92.08	57.15	34.93	2.791
6	192.09	122.24	76.20	45.24	5.614
8	247.65	157.16	101.60	55.56	10.480
10	306.5	223.84	130	93.84	-
12	364	265.11	155.2	109.91	-

FEMALE 45°




Nom. Pipe Size	Max. O.D. Dim. M2	S804U-1			
		K2	T	J2	Approx. Wt.(lb)
1/2	33.34	22.23	17.46	4.76	0.105
3/4	38.50	28.18	17.46	10.72	0.112
1	46.04	30.16	22.23	7.94	0.286
1 1/4	57.15	44.45	30.16	14.29	0.326
1 1/2	63.50	36.51	23.02	13.49	0.644
2	76.99	47.63	27.78	19.84	0.617
2 1/2	92.08	55.56	37.31	18.26	0.938
3	110.33	61.12	38.89	22.23	1.310
4	138.11	73.03	40.48	32.54	2.190

FEMALE TEES WITH BRASS

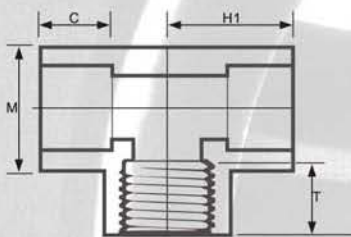

Nominal Size	Max. O.D. Dim. M	S806U			
		M	T	C	Approx. Wt.(lb)
1/2x1/2	30.56	17.46	22.62	36.12	
1/2x3/4	36.51	17.46	25.80	40.48	
3/4x3/4	44.45	22.23	30.16	46.83	

FEMALE TEES



Nom. Pipe Size	Max. O.D. Dim. M2	S805U-1			Approx. Wt.(lb)
		T	H2	G2	
1/2	33.34	19.05	30.56	11.51	0.143
3/4	38.10	21.43	34.93	13.49	0.194
1	46.83	25.40	39.69	14.29	0.288
1 1/4	56.36	25.40	47.23	21.83	0.558
1 1/2	63.90	25.00	52.78	27.78	0.732
2	76.99	26.59	60.33	33.73	0.930
2 1/2	90.49	36.91	75.41	38.50	1.380
3	109.54	36.51	84.14	47.63	2.296
4	138.11	40.48	98.43	57.94	3.690



HANJEWEL